


Project:		Catalog#:		Type:	
Prepared By:		Notes:		Date:	

E2BPL

Back-lit Flat Panel • 174,000 System
Lifetime • 10 Year Limited Warranty

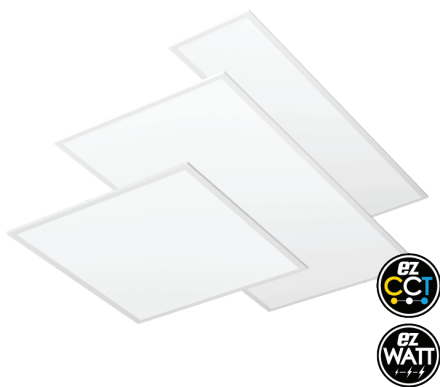

Overview

Energetic Lighting's E2BPL series is suitable for use in a broad range of commercial applications. Utilizing today's latest innovative LED solutions and technologies paired with world class manufacturing practices, the E2BPL provides customers an affordable LED back-lit panel offering with the perfect blend of design, performance, value and reliability. An extremely versatile product thanks to its low-profile design that is as shallow as many other higher priced edge-lit panels available today. As a result the E2BPL is well suited for installations with shallow plenum access. With our integral ezCCT field-selectable CCT along with flexibility ezWATT field-selectable wattage, these panels extend use to a broad range of commercial and industrial applications. The E2BPL is a great choice for renovation opportunities replacing existing fluorescent luminaires or for new construction projects that require code compliant energy saving LED solutions. Ideally suited for office spaces, schools, retail, hospitality and healthcare applications, the E2BPL provides high quality illumination with optimal energy savings.

Features

- ezCCT field-selectable CCT - 3500K, 4000K & 5000K @ >80 CRI
- ezWATT field-selectable Wattage - 3 steps, varied by models. (see stock ordering information)
- 2x4, 2x2, and 1x4 configurations available for design flexibility.
- Acrylic over-optics with polymer diffusing lens creates an extremely uniform visual aesthetic and provides target uniform illumination.
- 125+ LPW provides 40-60% in energy savings vs. fluorescent
- Die-formed steel housing won't flex during installation.
- 88% lumen maintenance @ 60,000 hours - L88/60,000 (per IES TM21)
- Projected L70 @ 174,000 hours = maintenance free illumination (per IES TM21)

Applications


- Suitable for Damp Location Installation
- Office, Healthcare, and Educational
- Hospitality and Grocery
- Retail, and Hallways



Highlights




Field-selectable CCT and wattage control provides flexibility to installation and stocking



Various knock-out available for ease of installation and wiring configuration needs



Clean and modern design with easy suspension installation.



Ultra-thin profile at only 1.5 inches saves weight packaging, storage, & challenging plenum clearance scenarios




Extruded aluminum lens frame with visually seamless corners



Integrated fold-out seismic hooks with suspension cable mounting hole

Accessories



Load Information

Input Voltage	120-347Vac	
Power Factor	>0.9	
THD	<20%	
Low Temp Start	-25°C (-13°F)	
Max Temp	45 °C (113°F)	
Unit Weight	1x4	6 lbs
	2x2	TBA lbs
	2x4	11 lbs

Shipping Information


Item	Weight	Box Qty.
1x4	15.5 lbs	2 per case
2x2	TBA lbs	2 per case
2x4	27 lbs	2 per case

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (50,000 hours)	Theoretical L70 (hours)
25°C	>88%	174,000
25°C	>88%	174,000
25°C	>88%	174,000

Dimensions

E2BPL1-H2130D-83550 | E2BPL2-H2130D-83550 | E2BPL4-H3645D-83550

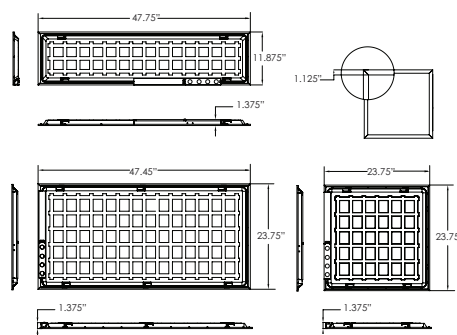

Specific Lumen Output

		Color Temperature Setting		
Profile	Wattage Setting	3500K	4000K	5000K
2x4	36W	4500	4700	4650
	40W	5000	5200	5150
	45W	5625	5900	5850
2x2	21W	2625	2700	2650
	25W	3125	3200	3150
	30W	3750	3800	3780
1x4	21W	2625	2600	2650
	25W	3125	3200	3150
	30W	3750	3850	3800



ENERGETIC
LIGHTING

E2BPL

EzCCT & ezWATT Selectable • Back-lit Flat Panel
174,000 System Lifetime • 10 Year Limited Warranty

Model Ordering Number

Series Prefix	Size	Voltage	Wattage	Dimming	CRI	CCT
E2BPL	4	H	3040	D	8	3550
E2BPL Energetic LED Back-lit Flat Panel ezWATT & ezCCT Selectable	1 1x4 2 2x2 4 2x4	H 120-327V	3040 30W-36W-40W 2130 21W-25W-30W 3040 30W-36W-40W 3645 30W-36W-40W 36 36W 40 40W	D 0-10V Dimmable (default)	8 80 CRI	3550 3500K, 4000K, or 5000K 40 4000K 50 5000K

Ordering Examples:

1. For E2BPL 2x4 36-40-45W ezWATT & CCT Selectable 120-347V

Model#: **E2BPL4-H3645D-83050**

2. For E2BPL 2x4 36-40-45W ezWATT & CCT Selectable 120-347V + Cable Suspension Kit 2x4 + Surface Mounting Kit 2x4

Model#: **E2BPL4-H3645D-83050**

Cable Suspension Kit

FPSUSP

Surface Mounting Kit for 2x4

EPSURF24

STOCK ORDER INFORMATION

1x4 | 2x2 | 2x4 Profile Housing 120-347V & 120-277V

Model Number	Order #	Lumens	Wattage	LPW	Color Temp	CRI	Voltage	Dimming	DLC	Pallet Qty
E2BPL1-H2130D-83550	65280	2625LM/3125LM /3750LM CCT	21W-25W-30W Selectable	125	3500K, 4000K, & 5000K CCT	84	120-347V	0-10V	DLC-5.1P	TBA
E2BPL2-H2130D-83550	65281	2625LM/3125LM /3750LM CCT	21W-25W-30W Selectable	125		84	120-347V	0-10V	DLC-5.1P	30
E2BPL4-H3645D-83550	65279	4500LM/5000LM /5625LM CCT	36W-40W-45W Selectable	125		84	120-347V	0-10V	DLC-5.1P	TBA
E2BPL4-3040D-83550	65297	3750LM/4375LM /5000LM CCT	30W-35W-40W Selectable	125		80	120-277V	0-10V	DLC-5.1S	TBA
E2BPL4-H36D-840	65299	4500LM	36W	125	4000K	84	120-347V	0-10V	DLC-5.1P	TBA
E2BPL4-H36D-850	65300	4500LM	36W	125	5000K	84	120-347V	0-10V	DLC-5.1P	TBA
E2BPL4-H40D-840	65301	5000LM	40W	125	4000K	84	120-347V	0-10V	DLC-5.1P	TBA
E2BPL4-H40D-850	65302	5000LM	40W	125	5000K	84	120-347V	0-10V	DLC-5.1P	TBA

Optional Accessories

Model Number	Order #	Description
FPSUSP	65153	Cable Suspension Kit
E1RFK-14	99030	1x4 Recessed Flange Kit
E1RFK-22	99031	2x2 Recessed Flange Kit
E1RFK-24	99032	2x4 Recessed Flange Kit
FPSURF14	65150	1x4 Flat panel surface mount
FPSURF22	65151	2x2 Flat panel surface mount
FPSURF24	65152	2x4 Flat panel surface mount



ENERGETIC®
L I G H T I N G


E2BPL

EzCCT & ezWATT Selectable • Back-lit Flat Panel
174,000 System Lifetime • 10 Year Limited Warranty

PHOTOMETRIC DATA


Model: E2BPL2-H2130D-83550
Test Report: E2BPL2-H21390D-83550.ies
CCT: 5000
Lamp Type: LED
Lumens: 4400 LM
Input Watts: 40 W
Efficacy: 110 LM/W

Lumen Intensity Graph: E2BPL2-H2130D-83550

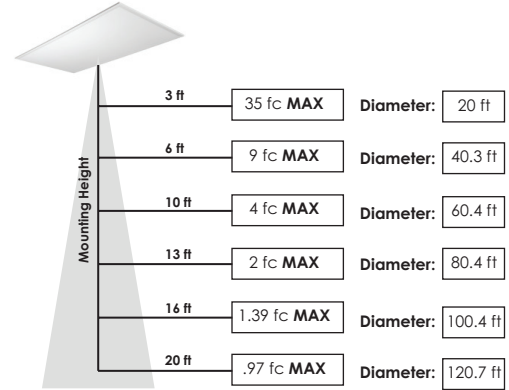

Model: E2BPL4-H3645D-83550
Test Report: E2BPL4-H3645D-83550.ies
CCT: 5000
Lamp Type: LED
Lumens: 4950 LM
Input Watts: 45 W
Efficacy: 110 LM/W

Lumen Intensity Graph: E2BPL4-H3645D-83550

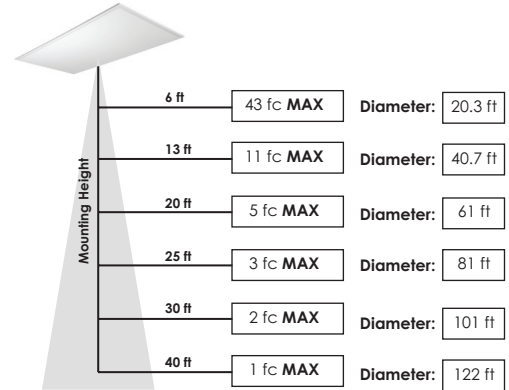




Accessories Dimensions


FPSUSP Cable Suspension Kit



FPSURF Surface Mount Kit 1x4 | 2x2 | 2x4

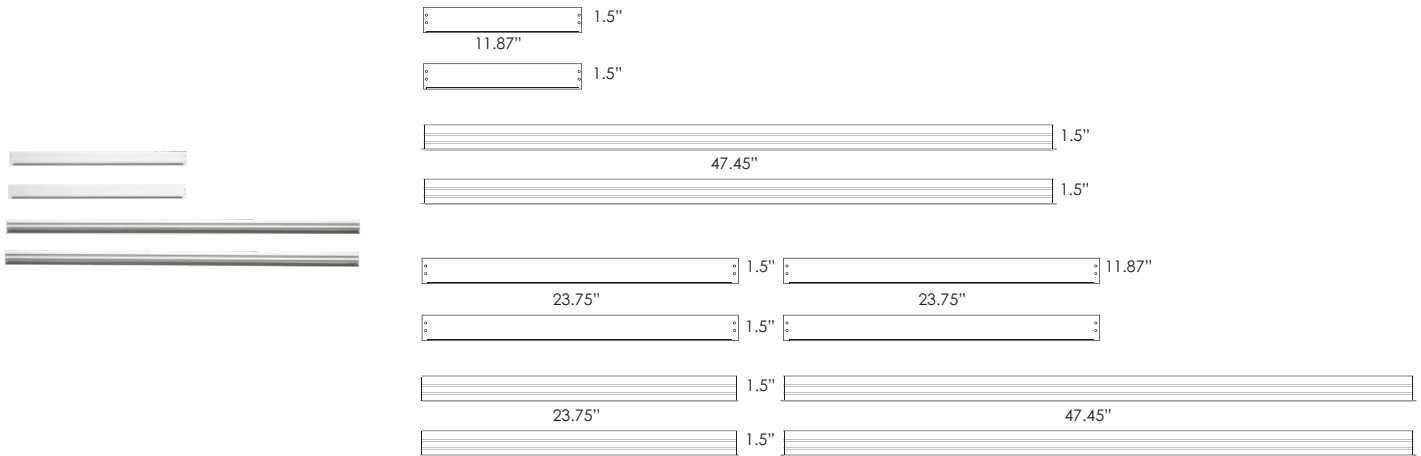

E1RFK Recessed Flanged Kit 1x4 | 2x2 | 2x4

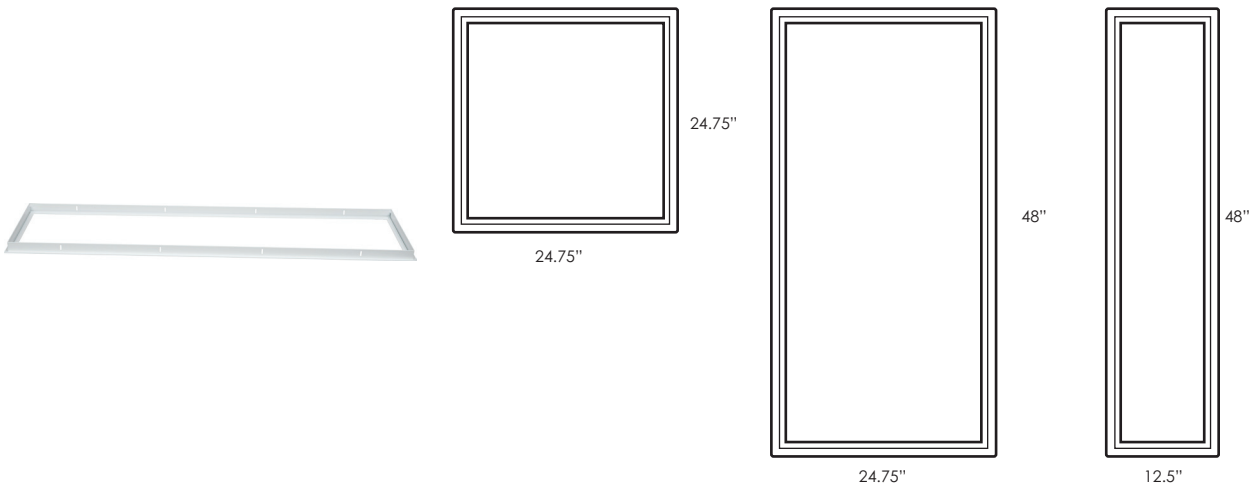



ENERGETIC®
L I G H T I N G

E2BPL

EzCCT & ezWATT Selectable • Back-lit Flat Panel
174,000 System Lifetime • 10 Year Limited Warranty

NOTES: