

Emergency Exit Sign With Bug Eyes



Project: _____ Part #: _____
Type: _____

Emergency Exit Signs



Detail Specifications:

- Finish: White Finish
- IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: 32°F to 104°F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

Applications:

- Exit Doors
- Corridor Intersections
- Exit Stairways
- Exit Ramps

Product Information:

- Built-in test switch and charge indicator
- Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
- Single Face
- 6" height letters with 3/4" stroke, viewable from 100ft away

Driver Options:

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

Mounting & Installations:

- Wall and ceiling mounted
- Universal J-box mounting pattern

Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Metts UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

REMOTE HEAD OPTIONS

LED-EM-RC-1

LED-EM-RC-2

Series

LED-EM-EXT-RG-WH-CMB-RC

RedGreen Color Selectable

Specs and model numbers are subject to change with or without notice.

FEATURES

Film Protectant

Fire-Retardant


Adjustable Knuckle

Wall & Ceiling Mount

Super Bright COB LED



DIMENSIONS

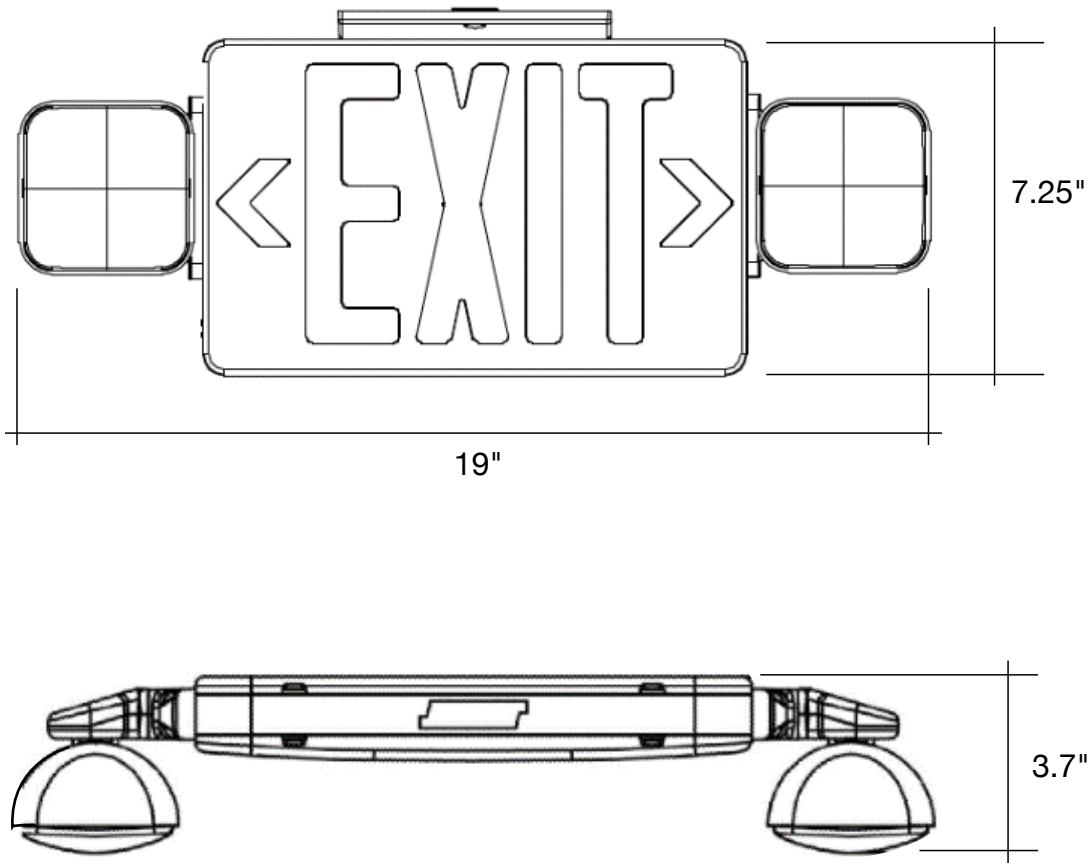

Specs and model numbers are subject to change with or without notice.