

Version	2.1	Date	1/26/25
Prepared By	JC		


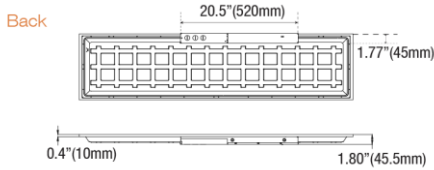
PRODUCT SPECIFICATION			
Category	Backlit Panel	PICTURE 	
Item Number	9462		
Stock Code	FXPNL40/1x4/8CCT3		
Mounting	Recessed		
Housing Color	White		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	40	Replacement Wattage (W)	90-100
Tested Wattage (W)	40		
Input Voltage (V)	120-277V	Surge Protect Level	2.5KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.37 (@120V)	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	-
THD	-		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	4,480	CCT (K)	3CCT (35/40/50K)
Efficacy (lm/w)	112	Beam Angle (°)	115°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 176°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
K7338333	FXPNL-BAEM-MT1FT-BLP/347	Emergency Driver with mounting kit
P10416	MT-1X4BOX-3.0IN	3.0" Height 1x4 Surface Mount Kit
P10334	MT-1X4BOX-4.5IN	4.5" Height 1x4 Surface Mount Kit
P10314	MT-1X4FMBOX	1x4 Flange Mount Kit

PRODUCT DIMENSIONS			
Width- in / (mm)	48"	1212	Front  Back 
Height- in / (mm)	12"	303	
Depth- in / (mm)	1.80"	45.5	
IK Rating	-		
Weight (lbs)	5.07		
Mounting Height (ft)	8~20		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS